





Please visit
www.thermoscientific.com/waterlibrary
 for more product
 information.

Thermo Scientific Orion pH Electrode Features

Select features to meet the needs of your applications

The Thermo Scientific Orion electrode line offers a wide variety of quality pH electrodes to choose from. There are many different factors to consider when you are selecting a pH electrode to ensure you select the electrode that will suit your needs. You will need to consider body materials, body styles, and sample requirements. Below is a quick guide to help you choose the correct pH electrode. If you still require assistance, please contact our technical service department at 800-225-1480 or 978-232-6000.

Body Materials

Glass Body	Epoxy Body
	
Compatible with virtually any sample, including solvents	Extremely durable, rugged body prevents breakage
Easy to clean	Electrode bulb protected by bulb guard
Can handle higher temperature	Low-maintenance gel-filled can be used in higher temperatures than glass low-maintenance electrodes

pH Body Style

Standard	Semi-Micro
	
12 mm diameter	6-8 mm diameter
Used in a wide variety of samples	For small samples sizes down to 200 µL
Micro	Rugged Bulb
	
1-5 mm diameter	Glass body
For samples as small as 0.5 µL and containers as small as 384 well plates	Extra durable pH bulb to prevent breakage
Spear Tip	Flat Surface
	
For piercing solid or semi-solid samples	For measuring surfaces of solid or gel samples
Can be used for small volumes	For use with small volumes

Fill Type


Refillable (Glass or Epoxy Body)	Polymer Filled (Sealed Glass or Epoxy Body)	Gel Filled (Sealed Epoxy Body)
Filling solution required	No filling solution needed	No filling solution needed
Easy maintenance, periodic filling and draining needed	Low maintenance, sealed reference	Low maintenance, sealed reference
Longer expected life	Easy to use	Easy to use
For use in a wide variety of applications	For use in a wide variety of applications	General purpose for everyday use
Best precision, 0.01 to 0.02 pH	0.02 pH precision	0.05 to 0.1 pH precision
Most rapid response time	Better response time	Good response time
Longest warranty, 1-2 years (6 months for Ag/AgCl micro electrodes)	1 year warranty	3-6 month warranty (18 months for ROSS 8107 models)

Reference Styles

ROSS Ultra®/ ROSS Reference®	Double Junction Ag/AgCl	Single Junction Ag/AgCl
0.01 pH precision	0.02 pH precision	0.02 to 0.1 pH precision
Best measurement response time	Better measurement response time	Good measurement response time
Best temperature response	Good temperature response	Good temperature response
Ideal for TRIS, protein and sulfide samples	Ideal for TRIS, protein and sulfide samples	General purpose for everyday use
Variety of body styles and types	Variety of body styles and types	Variety of body styles and types
Refillable or gel filled design	Refillable, polymer or gel filled design	Refillable or gel filled design

Junctions – Sure-Flow, Sleeve, Open, Ceramic, Wick and Glass Fiber

Sure-Flow®, Sleeve and Open	Ceramic and Glass Capillary	Wick and Glass Fiber
Best junction for dirty, difficult samples and demanding lab use	Better junction for routine lab use in a variety of samples	Good junction for routine lab use or field use in buffers and aqueous samples
Junction is clog free, easy to clean and has longest use life	Junction is high quality and durable	Good junction with durability
Ideal for thick or viscous samples, compatible with all sample types	Ideal for most lab applications and sample types	Ideal for basic lab applications and aqueous samples

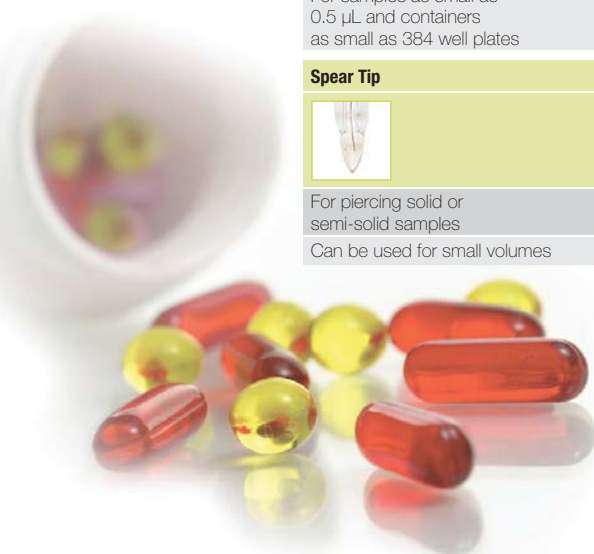



Thermo Scientific Electrode Styles

Thermo Scientific Orion Electrode Families and Types

Thermo Scientific Orion pH electrodes have a variety of different family of electrodes available to help with your measurements needs. They are designed to meet all your measurement needs.


Triodes

Combination pH electrode with built-in temperature sensor. Convenience with being able to measure pH and temperature with one electrode. BNC connector for pH measurement and alternative connector for temperature measurement. Compatible with only Thermo Scientific Orion pH meters as temperature connector and temperature element are unique to meter model.

ROSS Ultra® and ROSS® Electrodes

The best electrode available anywhere! Has the fastest response, best accuracy and reproducibility despite sample composition. Exhibits unmatched response to temperature variations. Double junction reference for complex samples such as biological media, foods, pharmaceuticals, TRIS, sulfides and proteins. Available in all body styles. ROSS Ultra electrodes have an industry best warranty.

The graph shows how ROSS electrodes respond versus the best of conventional pH electrodes. The ROSS electrode continues to show fast reproducibility and accuracy after many dramatic temperature changes.

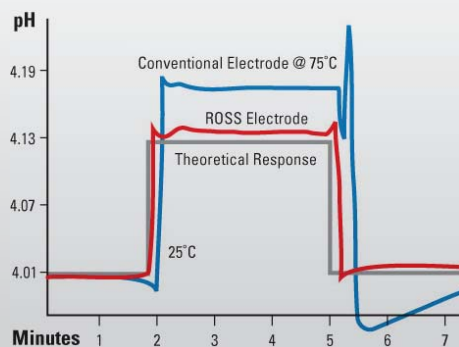

Temperature Response of the ROSS Ultra® and ROSS® Electrodes vs. Conventional Electrodes

AquaPro Professional pH Electrodes

Low maintenance polymer filled double junction electrode. For use in TRIS, sulfides, proteins and biological media. Has an extended life, fast response and clog resistant open junction. Available in standard, semi-micro, rugged bulb and flat surface body styles. The junction must be kept wet.

Double Junction

Isolated Ag/AgCl reference system which prevents silver from coming in contact with the sample. Great for measuring TRIS buffer, sulfide and protein samples. Available in standard and micro body styles.

No Cal®

Unique reference system that provides quick and accurate measurements. Great for measuring TRIS buffers sulfide and protein samples. No calibration required and accurate to 0.1 pH without calibration. Has the benefit of having a ceramic junction in an epoxy body and also a built-in temperature sensor.

Standard

A large variety of electrodes for a wide range of applications. Includes specialty pH electrodes for unique or challenging pH measurements. Available in most body styles. Micro electrodes capable of measuring samples as small as 0.5 µL in containers as small as 384 well plates.

KNipHE®

The pH electrode is housed in a body with a stainless steel blade for measuring meat, cheese and sludge samples.

Economy or Low-Maintenance

Good performance, valued priced, durable and low maintenance gel-filled pH electrodes. Available in standard, semi-micro and flat surface body styles.

Redox/ORP

The ideal choice for measuring the oxidation reduction potential of samples and performing redox titrations.

ATC Probes

Automatic temperature compensation probes measure sample temperatures and adjust pH measurements by correcting the electrode slope according to the measured temperature.



Thermo Scientific Orion pH Electrode Selection Guide

Sample Type	Electrode Recommendations
pH Precision	
Biological/Pharmaceutical – TRIS buffer, proteins, enzymes	Electrodes should have a ROSS or double junction Ag/AgCl reference (no sample contact with silver)
Education/Student Use	Electrodes should have an epoxy body for added durability
Emulsions – Foods, cosmetics, oils	Electrodes should have a Sure-Flow or open junction to prevent the electrode from clogging
Emulsions – Petroleum products, paint	Electrodes should have a glass body that resists damage from the sample and a Sure-Flow or open junction to prevent the electrode from clogging
Flat Surfaces – Cheese, meat, agar	Electrodes should have a flat-surface tip and ROSS or double junction Ag/AgCl reference (no sample contact with silver)
Flat Surfaces – Paper	Electrodes should have a flat-surface tip
General Purpose – Most sample types	All electrodes are suitable for general purpose measurements
Harsh Environments – Field or plant use, rugged use	Electrodes should have an epoxy body for added durability and be polymer or gel filled for easy maintenance
High Ionic Strength – Acids, bases, brines, pH > 12 or pH < 2	Electrodes should have a Sure-Flow or open junction for better contact with the sample and more stable measurements
Large Sample Sizes – Tall flasks	Electrodes should have a long body that fits the container
Low Ionic Strength – Treated effluent, deionized water, distilled water	Electrodes should be refillable for better contact with the sample and more stable measurements
Non-aqueous – Solvents, alcohols	Electrodes should have a glass body that resists damage from the sample and a Sure-Flow junction for better contact with the sample and more stable measurements
Semi-solids – Fruit, meat, cheese	Electrodes should have a spear tip for piercing samples and a ROSS or double junction Ag/AgCl reference
Small Sample Size – Micro-titer plates	Electrodes should have a small diameter that fits the container
Small Sample Size – NMR tubes	Electrodes should have a small diameter that fits the container
Small Sample Size – Test tubes, small flasks and beakers	Electrodes should have a small diameter that fits the container
Small Sample Size – TRIS buffer, proteins, sulfides	Electrodes should have a small diameter that fits the container and a ROSS or double junction Ag/AgCl reference
Titration	Electrodes should have a Sure-Flow or sleeve junction for better contact with the sample and more stable measurements
Viscous Liquids – Slurries, suspended solids sludges	Electrodes should have a Sure-Flow or open junction to prevent the electrode from clogging
Waters – Acid rain, boiler feed water, distilled water, rain water, well water	Electrodes should have a ROSS or double junction Ag/AgCl reference and be refillable for better contact with the sample
Waters – Drinking water, tap water	Electrodes should have an epoxy body for added durability
Waters – Wastewater, seawater	Electrodes should have a ROSS or double junction Ag/AgCl reference and have an epoxy body for added durability



ROSS Ultra®	ROSS®	AquaPro	Standard Ag/AgCl	Green	Micro Ag/AgCl	Double Junction	Economy/Basic
0.01	0.01	0.02	0.02	0.02 to 0.05	0.02	0.02	0.05 to 0.1
8102BNUWP 8107BNUMD 8156BNUWP 8157BNUMD	8102BN 8104BN 815600 8165BNWP 8172BNWP	9102AP 9104APWP 9107APMD 9156APWP		GD9106BNWP GD9156BNWP		9102DJWP 9156DJWP	
8107BNUMD 8156BNUWP 8157BNUMD	815600 8165BNWP	9107APMD 9156APWP	9107BNMD 9156BNWP 9157BNMD	GS9106BNWP GD9106BNWP		9156DJWP	9106BNWP
	8165BNWP 8172BNWP	9104APWP 9107APMD	9165BNWP 9172BNWP				
	8172BNWP	9102AP 9104APWP	9172BNWP				
8135BNUWP	8135BN	9135APWP					
8135BNUWP	8135BN	9135APWP					913600
8102BNUWP 8107BNUMD 8156BNUWP 8157BNUMD	8102BN 8104BN 815600 8165BNWP 8172BNWP	9102AP 9104APWP 9107APMD 9156APWP	9102BNWP 9107BNMD 9156BNWP 9157BNMD	GS9106BNWP GD9106BNWP GS9156BNWP GD9156BNWP		9102DJWP 9156DJWP	9106BNWP
8107BNUMD		9107APMD 9156APWP	9107BNMD	GS9106BNWP GD9106BNWP		9156DJWP	9106BNWP
	8165BNWP 8172BNWP	9104APWP 9107APMD 9102AP	9165BNWP 9172BNWP				912600
8102BNUWP 8156BNUWP 8157BNUMD	8102BN 815600 8165BNWP 8172BNWP		9165BNWP 9172BNWP	GS9156BNWP GD9156BNWP		9102DJWP	
	8172BNWP		9172BNWP				
	8163BNWP					9120APWP	
	8220BNWP				9810BN		
					9826BN		
8103BNUWP 8115BNUWP	8103BN 8115BN 8175BNWP	9103APWP 9115APWP	9103BNWP		9810BN 9826BN	9110DJWP	911600 912600
8103BNUWP 8115BNUWP	8103BN 8115BN 8175BNWP	9103APWP 9115APWP				9110DJWP	
	8162SC 8165BNWP 8172BNWP						
	8165BNWP 8172BNWP	9104APWP 9107APMD	9165BNWP 9172BNWP				
8102BNUWP 8156BNUWP 8157BNUMD	8102BN 815600 8165BNWP 8172BNWP		9165BNWP 9172BNWP	GS9156BNWP GD9156BNWP		9102DJWP	
8156BNUWP 8157BNUMD	815600 8165BNWP	9107APMD 9156APWP	9156BNWP 9165BNWP	GS9106BNWP GD9106BNWP		9156DJWP	9106BNWP
8156BNUWP 8157BNUMD	815600 8165BNWP	9107APMD 9156APWP	9165BNWP	GD9106BNWP GD9156BNWP		9156DJWP	



Thermo Scientific Orion ROSS pH Electrodes

The Best Choice For Superior Stability, Rapid Response, Accurate and Reproducible pH Measurements

ROSS pH electrodes offer unmatched benefits that you will not find in any other pH electrode. For more than 30 years, ROSS pH electrodes have been providing the best accuracy, stability and response you will find in a pH electrode. Before selecting an electrode, consider the advantages you will have if you choose a ROSS electrode.

Rapid Response and Superior Stability

Compared to conventional electrodes, the proven ROSS reference system exhibits superior stability in measurements, faster response, greater accuracy and precision when measuring samples that vary in temperature or when calibrating in temperatures that differ from your samples.

ROSS electrodes are much more stable over time and avoid the long term drift that other electrodes exhibit. Electrodes drift by less than 0.002 pH per day so recalibration is minimized.

Temperature Response

Most ROSS electrodes have a temperature range of 0 to 100 °C and show rapid response and stability even when measuring samples that differ by as much as 50 °C. The readings are much more accurate than standard electrodes in samples with extreme temperature variations. ROSS electrodes provide the correct reading within 30 seconds while standard electrodes are still trying to equilibrate and provide the correct reading after 3 minutes. The graph on page 63 illustrates this response.

No Sample Contamination

Standard silver chloride electrodes leach metal into the fill solution and eventually into the sample. ROSS electrodes do not contain any silver or mercury to react with the sample or to clog the electrode junction which causes sluggish response or inaccurate readings while also reducing electrode life. ROSS pH electrodes can be used in samples such as biological media, foodstuffs and pharmaceuticals where trace amount of metals cannot be tolerated.

Double Junction Design

This design allows you more control over an important variable. In order to minimize errors caused by junction potential, you can use a solution that is similar to the sample. The user also has the ability to change filling solutions to minimize contamination when potassium or chloride in the sample are undesirable.

ROSS electrodes have two main families to choose from. Each family has a variety of electrode options to choose from to ensure you have the correct electrode for your measurement needs. All contain the advantages mentioned previously.

ROSS Ultra®

ROSS Ultra electrodes offer the best stability and drift free measurements of all ROSS electrodes. The reference system is designed to provide an enhanced life. We are so confident of it that the warranty is double that of standard ROSS electrodes. Refillable ROSS Ultra electrodes have a 2 year warranty while the low-maintenance triode™ has an 18 month warranty.


The ROSS Ultra line features glass or epoxy electrodes, refillable or low-maintenance design, flat surface and semi-micro designs. ROSS Ultra Triodes include a built-in temperature sensor and provide faster temperature response than other 3-in-1 electrodes.

ROSS®

Standard ROSS electrodes provide the same rapid response, accuracy and temperature response of all ROSS electrodes. The reference system provides excellent stability. These electrodes provide a one year warranty. They are available in a variety of styles such as the clog free Sure-Flow junction, glass or epoxy electrodes, flat surface, semi-micro, micro and spear tip designs. All standard ROSS electrodes have a refillable design and do not contain a built-in-temperature element.

ROSS Electrode Specifications:

- **Slope:** 92-102 % of theoretical Nernst slope
- **Isopotential Point:** pH 7
- **Accuracy of measuring a pH 6.86 buffer after standardization at 25 °C:** Accurate within 0.03 pH for buffer at any temperature between 0-100 °C using automatic temperature compensation
- **Speed of Response in 6.86 buffer going from 25 to 75 °C:** Response stable to 0.01 pH within 30 seconds
- **Speed of Response between 6.86 and 4.01 buffers at 25 °C:** Response stable to 0.002 pH within 15 seconds
- **Mercury free, TRIS, protein and sulfide compatible**

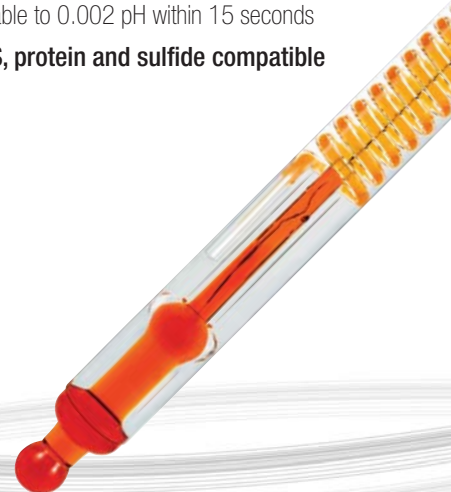



Thermo Scientific Orion Sure-Flow pH Electrodes

Clog Free Long Lasting Junction

Sure-Flow® Junction

The unique, free-flowing liquid-to-liquid junction assures you of the most stable, drift-free measurements. The easy-to-clean junction never clogs, simply press the cap and flush the junction area. Release the cap and the junction is reset. Now even the most problematic, dirty or viscous samples can be easily measured without a clogged junction! The Sure-Flow junction has proven reliability and extends the electrode life.

ROSS electrodes provide unmatched accuracy and response to extreme temperature changes. They are compatible with samples containing organic compounds, proteins, heavy metals, and other compounds that react with silver such as bromides, iodides, cyanides and sulfides.

Silver chloride sure-flow electrodes can be used on tough samples that do not require a double junction electrode to prevent contact with silver.

ROSS Sure-Flows are also available as semi-micro pH and reference half cell electrodes on pages 75 and 80.

High performance in all samples



ROSS® Sure-Flow® combination pH electrode with glass body

- Sure-Flow junction prevents clogging
- For soil, sludge, colloids, viscous material and organic solvents

Fast response – even in difficult samples



ROSS® Sure-Flow® combination pH electrode with epoxy body

- Ideal for soil samples
- Durable epoxy design
- For TRIS, sulfides and proteins

For all samples including solvents



Sure-Flow® combination pH electrode with glass body

- For soil, sludge, colloids, and viscous material
- Chemical resistant glass body

Fast response in difficult samples & soils



Sure-Flow® combination pH electrode with epoxy body

- Rugged, durable epoxy design
- Has removable bulb guard

Cat. No.	8172BNWP	8165BNWP 8165DN	9172BNWP	9165BNWP
pH Range	0-14	0-14	0-14	0-14
pH Precision	0.01	0.01	0.02	0.02
Temp. Range	0-100 °C	0-100 °C	0-100 °C	0-100 °C
Internal Reference	ROSS	ROSS	Ag/AgCl	Ag/AgCl
Junction	Sure-Flow	Sure-Flow	Sure-Flow	Sure-Flow
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof	BNC Waterproof EDIN Waterproof	BNC Waterproof	BNC Waterproof

Cat. No.	Recommended Accessories
810001	ROSS storage solution
810007	ROSS fill solution
900011	Ag/AgCl fill solution
910001	Ag/AgCl storage solution



Key Information

ROSS electrodes are environmentally-safe mercury-free option for TRIS, protein and sulfide. All cap diameters are 16 mm at bottom of cap. All cable lengths are 1 meter.



Thermo Scientific Orion Triode pH Electrodes

Measures pH and Temperature with One Electrode

All Thermo Scientific Orion Triodes™ have built-in temperature sensors allowing you to measure pH and temperature with one electrode. There are a variety of electrodes based on your sample and application.

The ROSS Ultra Triodes offer such great stability and drift that the warranty period is double other electrodes. The refillable electrodes have a two year replacement warranty. The gel-filled ROSS Ultra Triode electrodes have an 18 month warranty.

Complex samples, such as biological media, foods and pharmaceuticals, can be measured easily. All ROSS Ultra electrodes can be used in samples that contain TRIS, sulfides or proteins.

ROSS Ultra electrodes offer the best temperature performance of all other electrodes in repeated, varying temperatures.

The AquaPro Triode has the advantage of having an open junction that does not clog and double junction reference. For use in samples with TRIS, protein and sulfides.

Ag/AgCl Triodes have good response and are ideal for routine measurements.

Top performance with glass body



ROSS Ultra® pH/ATC Triode with glass body

- High performance for QC and research
- Chemical resistant glass body

Low maintenance with extended life



ROSS Ultra® pH/ATC Triode with epoxy body, low maintenance gel

- Low maintenance gel
- Rugged epoxy body

Refillable, convenience and durable



ROSS Ultra® pH/ATC Triode with epoxy body

- General purpose, high performance
- Rugged epoxy body

	Cat. No. 8302BNUMD (Star)	8107BNUMD (Star)* 8107UWMMMD (Star)	8157BNUMD (Star)* 8157UWMMMD (Star)
pH Range	0-14	0-14	0-14
pH Precision	0.01	0.01	0.01
Temp. Range	0-100 °C	0-80 °C	0-100 °C
Temp. Accuracy	±1.0 °C	±1.0 °C	±1.0 °C
Internal Reference	ROSS	ROSS	ROSS
Junction	Ceramic	Glass capillary	Glass fiber
Fill Solution (Cat. No.)	3 M KCl (810007)	—	3 M KCl (810007)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof - MiniDIN (Star)	BNC Waterproof - MiniDIN (Star)* BNC Waterproof - MiniDIN (Star)* 3 m	BNC Waterproof - MiniDIN (Star)* BNC Waterproof - MiniDIN (Star)* 3 m

Cat. No.	Recommended Accessories
810001	ROSS storage solution
810007	ROSS fill solution
900001	Ag/AgCl fill solution
910001	Ag/AgCl storage solution



Electrode maintains calibration for one year



- BEST
- TRIS COMPATIBLE
- SUPERIOR TEMPERATURE CONTROL

No Cal[®] combination pH electrode with epoxy body and built-in ATC

- Designed for stable, high performance pH analysis in the field
- Accurate to 0.1 pH without calibration

Rugged design with clog free open junction



- BETTER
- TRIS COMPATIBLE

AquaPro pH/ATC Triode™ with low maintenance polymer, epoxy body

- Low maintenance for Star meters

Low maintenance



- BETTER

pH/ATC Triode™ with epoxy body, low maintenance gel

- Low maintenance gel
- Epoxy body for ruggedness

Low maintenance



- BETTER

pH/ATC Triode™ with epoxy body, low maintenance

- Low maintenance gel
- Epoxy body for ruggedness

Refillable and durable



- BETTER

pH/ATC Triode™ with epoxy body, refillable

- Long-lasting
- Epoxy body for ruggedness

Low maintenance and reliable



- GOOD

pH/ATC Triode™ with epoxy body, low maintenance gel

- General purpose
- For Russell RL060P meter

5107BNMD (Star) 5107NC (A+ Series)	9107APMD (Star)	9107BNMD (Star)* 9107WMMMD (Star)* 9107WLMD (Star)* 9107BN (A+ Series) 9107WP†	9109WP 9109WL	9157BNMD (Star) 9157BN (A+ Series)	9147BN
0-14	0-14	0-14	0-14	0-14	0-14
0.01	0.02	0.02	0.02	0.02	0.1
0-100 °C	0-60 °C	0-80 °C	0-80 °C	0-90 °C	0-50 °C
±1.0 °C	±2.0 °C	±2.0 °C	±2.0 °C	±2.0 °C	±2.0 °C
Platinum	Ag/AgCl Double junction	Ag/AgCl	Ag/AgCl	Ag/AgCl	Ag/AgCl
Ceramic	Open	Wick	Wick	Glass fiber	HDPE pin
No Cal (510011)	—	—	—	4 M KCl w/ Ag/AgCl (900011)	—
L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm Cap D - 22 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
BNC - MiniDIN (Star) BNC - 8 Pin (A+ Series)	BNC - MiniDIN (Star)	BNC - MiniDIN (Star) BNC - 8 Pin (A+ Series)†	EDIN Waterproof Banana Plug	BNC - MiniDIN (Star) BNC - 8 Pin (A+ Series)	BNC 2.5 mm Phono Tip



Key Information

Cable lengths range from 1 to 6 meters
 WMMMD = 3 meters, WLMD = 6 meters,
 9109WL = 6 meters
 9109 cap is for intrinsically safe meters



Thermo Scientific Orion Glass Refillable pH Electrodes

Chemical Resistant Glass Bodies

Glass body electrodes offer superior chemical resistance. They are also able to withstand higher temperatures than epoxy electrodes, with some models able to be used up to 100 °C. Glass electrodes are also easy to clean as they are compatible with most solvents and inorganic materials.

ROSS Ultra and ROSS electrodes provide unmatched ROSS accuracy and rapid response to temperature extremes. All are TRIS compatible. ROSS Ultra glass electrodes have an industry best 2 years warranty.

AquaPro refillable electrodes are TRIS compatible and have an open junction that does not clog.

Double junction electrodes are recommended for samples containing organic compounds, proteins, heavy metals and other compounds that interact with silver.

Single junction electrodes provide a reliable option for routine pH measurement.

Top performance for QC and research



ROSS Ultra® combination pH electrode with extended life

- For precise pH determinations
- General purpose, high performance


Precise yet durable, for QC and research



ROSS Ultra® combination pH electrode with rugged bulb, extended life

- Toughened bulb for rugged lab use


For precise and reproducible pH determinations

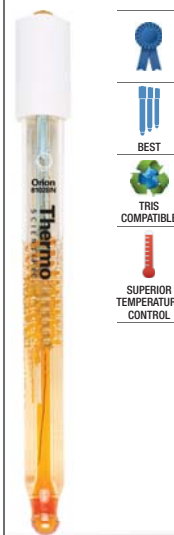

ROSS® combination pH electrode

- General purpose, high performance
- For QC and research applications

Durable, for precise pH analysis

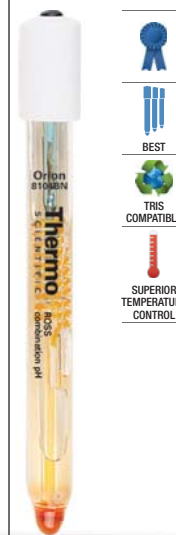

ROSS® combination pH electrode with glass body, rugged bulb

- Toughened bulb for rugged lab use
- For QC and research applications

Cat. No.	8102BNUWP	8104BNUWP	8102BN 8102SC	8104BN 8104SC
pH Range	0-14	0-14	0-14	0-14
pH Precision	0.01	0.01	0.01	0.01
Temp. Range	0-100 °C	0-100 °C	0-100 °C	0-100 °C
Internal Reference	ROSS	ROSS	ROSS	ROSS
Junction	Ceramic	Ceramic	Ceramic	Ceramic
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	3 M KCl (810007)	3 M KCl (810007)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof	BNC Waterproof	BNC Screw Cap	BNC Screw Cap

Cat. No.	Recommended Accessories
910001	Ag/AgCl storage solution
900011	Ag/AgCl fill solution
910008-WA	3 M KCl double junction fill solution

Cat. No.	Recommended Accessories
810001	ROSS storage solution
810007	ROSS fill solution



For accurate pH analysis and titrations



- BEST
- TRIS COMPATIBLE
- SUPERIOR TEMPERATURE CONTROL

ROSS® combination pH electrode with 14/15 standard taper

- For titrators or vessels that require a standard taper joint

Accurate and reliable



- BETTER
- TRIS COMPATIBLE

Double Junction combination pH electrode

- General purpose
- Easy-to-clean design

General purpose for everyday use



- BETTER
- BETTER

Combination pH electrode

- For routine or research applications

Durable and reliable




- BETTER
- BETTER

Combination pH electrode with rugged bulb

- Toughened bulb for rugged lab use

General purpose and reliable

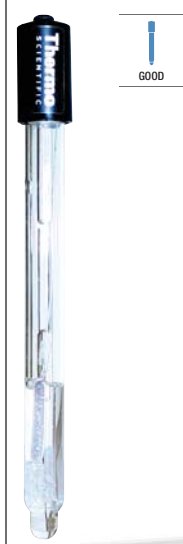

- GOOD

Combination pH electrode

- General purpose
- Easy-to-clean design

8162SC	9102DJWP	9102BNWP 9102SC	9104BNWP 9104SC	9142BN
0-14	0-14	0-14	0-14	0-14
0.01	0.02	0.02	0.02	0.1
0-100 °C	0-60 °C	0-90 °C	0-90 °C	0-90 °C
ROSS	Ag/AgCl Double junction	Ag/AgCl	Ag/AgCl	Ag/AgCl
Sleeve	Ceramic	Ceramic	Ceramic	Ceramic
3 M KCl (810007)	3 M KCl (910008-WA)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)
L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Screw Cap	BNC Waterproof	BNC Waterproof Screw Cap	BNC Waterproof Screw Cap	BNC



Key Information
 All cap diameters are 16 mm
 All cable lengths are 1 meter



Thermo Scientific Orion Epoxy Refillable pH Electrodes

Rugged Epoxy Body Prevents Breakage

Epoxy body electrodes are ideal for field measurements or situations where they will be exposed to rugged handling. The electrode body surrounds the glass pH bulb providing further protection.

ROSS Ultra and ROSS electrodes exhibit unmatched accuracy and rapid response to extreme temperature variations. All are TRIS compatible. The ROSS Ultra electrode has an unprecedented 2 year warranty.

Green electrodes are the first lab electrode to contain no lead, mercury or other hazardous substances and are completely ROHS compliant. They are available in single or double junction designs.

Silver chloride epoxy electrodes provide excellent response and performance in routine samples.

Top performance – precise pH analysis with durability



- BEST
- TRIS COMPATIBLE
- SUPERIOR TEMPERATURE CONTROL

ROSS Ultra® combination pH electrode with epoxy body

- Top accuracy and rapid response to temperature extremes
- General purpose, high performance
- Extended life

Durable for precise pH applications




- BEST
- TRIS COMPATIBLE
- SUPERIOR TEMPERATURE CONTROL

ROSS® combination pH electrode with epoxy body

- Top accuracy and rapid response to temperature extremes
- General purpose, high performance

Refillable, double junction

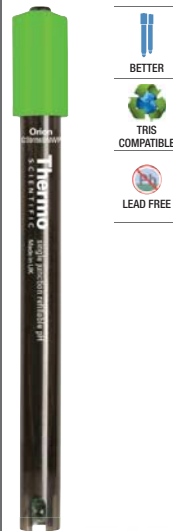

- BETTER
- TRIS COMPATIBLE
- LEAD FREE

Green combination double junction refillable pH electrode with epoxy body

- Ideal for routine or research applications
- Use in dirty water or TRIS, sulfide and protein samples
- Contains no lead

Refillable, rugged epoxy body



- BETTER
- LEAD FREE

Green combination refillable pH electrode with epoxy body

- Ideal for routine or research applications
- Contains no lead

General purpose and reliable



- BEST

Combination pH electrode with epoxy body

- For routine or research applications
- Reliable and durable

Cat. No.	8156BNUWP	815600 8155SC	GD9156BNWP	GS9156BNWP	9156BNWP 9156SC
pH Range	0-14	0-14	0-14	0-14	0-14
pH Precision	0.01	0.01	0.02	0.02	0.02
Temp. Range	0-100 °C	0-100 °C	0-90 °C	0-90 °C	0-90 °C
Temp. Accuracy	–	–	–	–	–
Internal Reference	ROSS	ROSS	Ag/AgCl Double junction	Ag/AgCl	Ag/AgCl
Junction	Glass fiber	Glass fiber	Glass fiber	Glass fiber	Glass fiber
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	3 M KCl (910008-WA)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof	BNC Screw Cap	BNC Waterproof	BNC Waterproof	BNC Waterproof Screw Cap

Cat. No.	Recommended Accessories
900011	Ag/AgCl fill solution
810007	ROSS fill solution
910008-WA	3M KCl double junction fill solution





Thermo Scientific Orion Micro pH Electrodes

Delicate Electrode for Small Volumes, Fits 384 Microwell Plates


Micro electrodes are designed to measure small volumes down to 0.5 μL . These are extremely delicate electrodes because of their size and should be treated as such. The small stem and bulb diameter allow the electrode to be inserted into small devices such as 384 microwell plates. There are a variety to choose from based on your measurement needs.

The ROSS 8220BNWP micro electrode provides the best accuracy and response time of the micro electrodes. It can be used in biological samples. The 8220BNWP is more durable than the silver chloride electrodes.

Silver chloride micro electrodes are single junction electrodes. They are available to measure samples as small as 0.5 μL , for use in NMR tubes and available with a stainless steel needle tip over the glass stem and bulb.

The double junction micro electrode is for moderate size samples. The double junction design is good for use when measuring TRIS samples, proteins, sulfides or biologicals.

Accurate in extremely small samples

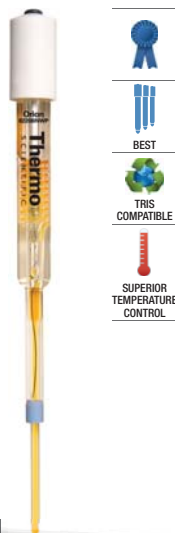

PerpHecT[®] ROSS[®] combination pH electrode with glass body, micro

- Measures samples as small as 15 μL in 384 well plates
- Minimum depth of immersion is 4.5 mm
- Durable tip design

Measure samples as small as 0.5 μL



Micro combination pH electrode with glass body, small tip

- Designed for gels and small sample volumes
- Measure samples as small as 0.5 μL

For use in NMR tubes



Micro combination pH electrode with glass body, long length

- Ideal for measurements in extremely small vessels

For piercing septa



Micro combination pH electrode with needle tip

- 16 gauge stainless steel bevel tip

For samples with size limitations



Double Junction combination pH electrode with glass body, semi-micro tip

- Measure samples as small as 0.2 mL
- Easy-to-clean refillable design

Cat. No.	8220BNWP	9810BN	9826BN	9863BN	9110DJWP
pH Range	0-14	0-14	0-14	0-14	0-14
pH Precision	0.01	0.02	0.02	0.02	0.02
Temp. Range	0-100 °C	0-80 °C	0-80 °C	0-80 °C	0-60 °C
Temp. Accuracy	±0.5 °C	–	–	–	–
Internal Reference	ROSS	Ag/AgCl	Ag/AgCl	Ag/AgCl	Ag/AgCl Double junction
Junction	Sleeve	Ceramic	Ceramic	Ceramic	Ceramic
Fill Solution (Cat. No.)	3 M KCl (810007)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)	3 M KCl (910008-WA)
Dimension D (Dia) L (Length) T (Tip)	L - 155 mm T - 3 mm x 40 mm L	L - 120 mm T - 1.3 mm x 37 mm L	L - 228 mm T - 2.5 mm x 2.5 mm L	L - 137 mm T - 1.7 mm x 40 mm L	L - 150 mm T - 4.5 mm x 90 mm L
Depth of Immersion	4.5 mm	1 mm	2 mm	3 mm	–
Connector Type	BNC Waterproof	BNC	BNC	BNC	BNC Waterproof



Key Information

All cap diameters are 16 mm at bottom of cap except 9810BN, 9826BN & 9863BN
All cable lengths are 1 meter



Thermo Scientific Orion Glass Semi Micro pH Electrodes

Measures Samples As Small As 0.2 mL. Fits Test Tubes and Small Containers


Glass body semi-micro pH electrodes provide superior chemical resistance and can withstand high temperatures extremes. There are a variety of options to choose from.

ROSS Ultra and ROSS semi-micro pH electrodes provide optimum accuracy and unmatched response in samples of varying temperatures. They are available in chemical resistant glass bodies. All ROSS electrodes are TRIS compatible.

AquaPro semi-micro electrodes have a clog free open junction and are TRIS compatible.

Silver chloride semi-micro electrodes are durable and provide reliable and accurate measurements of routine samples.

Ideal for QC samples with size limitations



ROSS Ultra® combination pH electrode with glass body, semi-micro tip

- Extended life
- TRIS compatible
- Fast response at temperature extremes

Fast, reliable results in small samples



ROSS® combination pH electrode with glass body, semi-micro tip

- TRIS compatible
- Fast response at temperature extremes

Fast response in small samples



AquaPro combination pH electrode with low maintenance polymer, glass body, semi-micro tip

- TRIS compatible
- Open junction prevents clogging

For samples with size constraints



Combination pH electrode with glass body, semi-micro tip

- For routine or research applications

Cat. No.	8103BNUWP	8103BN 8103SC	9103APWP	9103BNWP 9103SC
pH Range	0-14	0-14	0-14	0-14
pH Precision	0.01	0.01	0.02	0.02
Temp. Range	0-100 °C	0-100 °C	0-60 °C	0-90 °C
Internal Reference	ROSS	ROSS	Ag/AgCl Double junction	Ag/AgCl
Junction	Ceramic	Ceramic	Open	Ceramic
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	-	4 M KCl w/ Ag/AgCl (900011)
Dimension D (Dia) L (Length) T (Tip)	L - 165 mm T - 6 mm x 95 mm L	L - 165 mm D - 6 mm x 95 mm L	L - 165 mm T - 6.5 mm x 100 mm L	L - 165 mm T - 6.5 mm x 100 mm L
Connector Type	BNC Waterproof	BNC Screw Cap	BNC Waterproof	BNC Waterproof Screw Cap

Cat. No.	Recommended Accessories
910001	Electrode storage solution
900011	Ag/AgCl fill solution
810001	ROSS storage solution
810007	ROSS fill solution



Key Information

All cap diameters are 16 mm
All cable lengths are 1 meter















Thermo Scientific Orion Epoxy Semi Micro pH Electrodes

Rugged Body for Small Samples or Narrow Containers

Epoxy body semi-micro pH electrodes provide a rugged design. They are available in double junction or single junction designs as well as refillable or low-maintenance options.

ROSS electrodes offer optimum accuracy and temperature response. AquaPro electrodes provide maintenance-free use. Silver chloride electrodes are for routine measurements.

	For difficult samples with size limitations	For aqueous samples with size constraints	Dependable results in small samples	Fast response in small samples	For everyday use in small samples	For everyday use in tall containers
						
						
	ROSS® Sure-Flow® combination pH electrode with epoxy body, semi-micro tip	ROSS Ultra® combination pH electrode with epoxy body, semi-micro tip	ROSS® combination pH electrode with epoxy body, semi-micro tip	AquaPro combination pH electrode with low maintenance polymer, epoxy body, semi-micro tip	Combination pH electrode with epoxy body, low maintenance gel, semi-micro tip	Combination pH electrode with epoxy body, low maintenance gel, flask length
	<ul style="list-style-type: none"> Sure-Flow junction prevents clogging Measure samples as small as 0.2 mL 	<ul style="list-style-type: none"> Measures samples as small as 0.2 mL Epoxy body for ruggedness and durability 	<ul style="list-style-type: none"> Epoxy body for ruggedness and durability Measures samples as small as 0.2 mL 	<ul style="list-style-type: none"> TRIS compatible Open junction prevents clogging 	<ul style="list-style-type: none"> Measure samples as small as 0.2 mL 	<ul style="list-style-type: none"> Designed for use in long-necked flasks

Cat. No.	8175BNWP	8115BNUWP	8115BN 8115SC	9115APWP	911600	912600
pH Range	0-14	0-14	0-14	0-14	0-12	0-12
pH Precision	0.01	0.01	0.01	0.02	0.1	0.1
Temp. Range	0-100 °C	0-100 °C	0-100 °C	0-60 °C	0-80 °C	0-80 °C
Internal Reference	ROSS	ROSS	ROSS	Ag/AgCl Double junction	Ag/AgCl	Ag/AgCl
Junction	Sure-Flow	Glass fiber	Glass fiber	Open	Wick	Wick
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	3 M KCl (810007)	-	-	-
Dimension D (Dia) L (Length) T (Tip)	L - 165 mm T - 8 mm x 95 mm L	L - 165 mm T - 8 mm x 95 mm L	L - 165 mm T - 8 mm x 95 mm L	L - 160 mm T - 8 mm x 90 mm L	L - 145 mm D - 6 mm	L - 305 mm D - 8 mm
Connector Type	BNC Waterproof	BNC Waterproof	BNC Screw Cap	BNC Waterproof	BNC	BNC



Key Information
 All cap diameters are 16 mm except 911600
 All cable lengths are 1 meter



Thermo Scientific Orion Low Maintenance pH Electrodes

Never Requires Fill Solution

Low maintenance pH electrodes are easy to use and require minimal maintenance. Since the reference chamber is sealed, you never need to replace fill solution or clean and rinse the reference chamber. You may choose from many styles such as AquaPro, Green electrodes, double junction or silver chloride electrodes to suit your measurement needs.

AquaPro low maintenance pH electrodes offer open junctions that do not clog. Choose between chemical resistant glass bodies or durable epoxy bodies. All AquaPro electrodes are TRIS compatible.

Green electrodes contain no hazardous substances such as mercury or lead and are ROHS compliant.

Double junction electrodes are TRIS compatible and you do not have to worry about interfering substances.

Silver chloride electrodes offer low maintenance as well as reliable measurements for everyday use.

Reliable and accurate



AquaPro combination pH electrode with low maintenance polymer, glass body

- General purpose, high performance

Precise and durable



AquaPro combination pH electrode with low maintenance polymer, glass body, rugged bulb

- Toughened bulb for rugged lab use

Rugged and accurate



AquaPro combination pH electrode with low maintenance polymer, epoxy body

- General purpose, high performance

Low maintenance, double junction



Green combination double junction pH electrode, gel with epoxy body

- Ideal for education, plant or field use
- Use in dirty water or TRIS, sulfide and protein samples
- Contains no lead

Cat. No.	9102AP	9104APWP	9156APWP	GD9106BNWP
pH Range	0-14	0-14	0-14	0-14
pH Precision	0.02	0.02	0.02	0.02
Temp. Range	0-60 °C	0-60 °C	0-60 °C	0-90 °C
Internal Reference	Ag/AgCl Double junction	Ag/AgCl Double junction	Ag/AgCl Double junction	Ag/AgCl Double junction
Junction	Open	Open	Open	Glass capillary
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC	BNC Waterproof	BNC Waterproof	BNC Waterproof

Cat. No.	Recommended Accessories
910001	Electrode storage solution
910199	All-in-one pH buffer kit



Low maintenance, rugged epoxy body



-  BETTER
-  LEAD FREE

Green combination pH electrode, gel with epoxy body

- Ideal for education, plant or field use
- Contains no lead

Durable and low maintenance



-  BETTER
-  TRIS COMPATIBLE

Double Junction combination pH electrode with epoxy body, low maintenance gel

- Low maintenance gel with durable epoxy body

For rugged, everyday use



-  GOOD
-  GOOD

Combination pH electrode with epoxy body, low maintenance gel

- Ideal for field, plant, or educational applications

Reliable every day use



-  GOOD

Combination pH electrode with epoxy body, low maintenance gel

- General purpose use
- Removable bulb guard makes cleaning easy

GS9106BNWP	9156DJWP	9106BNWP	9146BN
0-14	0-14	0-14	0-14
0.05	0.02	0.05	0.1
0-90 °C	0-60 °C	0-80 °C	0-80 °C
Ag/AgCl	Ag/AgCl Double junction	Ag/AgCl	Ag/AgCl
Glass capillary	Wick	Wick	Wick
L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
BNC Waterproof	BNC Waterproof	BNC Waterproof	BNC



Key Information
 All cap diameters are 16 mm
 All cable lengths are 1 meter



Thermo Scientific Orion Flat Surface pH Electrodes

Measure Moist Surfaces Such As Agar Gel Plates, Meats and Cheese

Flat surface electrodes are epoxy body electrodes with a flat pH bulb that allow you to measure moist solid samples or small volumes. They can be used on samples such as meats, cheese or in agar gel plates. Flat surface pH electrodes are available in single or double junction designs allowing you to measure samples such as TRIS buffers or samples containing protein, sulfides or other compounds that react with silver. You may also choose from refillable or low maintenance designs.

Thermo Scientific Orion ROSS Ultra and ROSS flat surface electrodes provide optimum accuracy and stability while being TRIS compatible. The ROSS Ultra flat surface electrode has a 2 year warranty.

The AquaPro flat surface electrode is TRIS compatible and has an open junction that does not clog. The 9135APWP AquaPro flat surface electrode is a low maintenance model never requiring fill solution.

The silver chloride 913600 flat surface electrode is a low maintenance electrode that is ideal for routine measurements.

Ideal for soft solid and semi-solid samples



ROSS Ultra® combination pH electrode with epoxy body, flat surface

- Extended life and 2 year warranty
- Rapid response to temperature extremes

For soft solid and semi-solid samples



ROSS® combination pH electrode with epoxy body, flat surface

- Premium performance
- Rapid response to temperature extremes

For soft solids and semi-solids



AquaPro combination pH electrode with low maintenance polymer, epoxy body, flat surface

- Clog free junction for tough samples

For solids and semi-solids



Combination pH electrode with epoxy body, low maintenance gel, flat surface

- For routine flat surface measurements

Cat. No.	8135BNUWP	8135BN 8135SC	9135APWP	913600
pH Range	0-14	0-14	0-14	0-12
pH Precision	0.01	0.01	0.02	0.1
Temp. Range	0-100 °C	0-100 °C	0-60 °C	0-80 °C
Internal Reference	ROSS	ROSS	Ag/AgCl Double junction	Ag/AgCl
Junction	Glass fiber	Glass fiber	Open	Wick
Fill Solution (Cat. No.)	3 M KCl (810007)	3 M KCl (810007)	-	-
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 110 mm D - 12 mm
Connector Type	BNC Waterproof	BNC Screw Cap	BNC Waterproof	BNC

Cat. No.	Recommended Accessories
910001	Electrode storage solution
900011	Ag/AgCl fill solution
810007	ROSS fill solution
910008-WA	3 M KCl fill solution



Key Information
All cable lengths are 1 meter



Thermo Scientific Orion Spear Tip pH Electrodes

For Piercing Fruits, Cheese and Meats

Spear tip pH electrodes can be used for piercing soft samples like cheese or fruit or cutting through tougher samples such as meat. All have refillable designs. They are available in single junction or double junction designs which can be used with TRIS samples, proteins or sulfides.

The ROSS spear tip electrode offers the proven accuracy and response that ROSS electrodes are known for and is a double junction electrode. It is suited for semi-solid samples.

The 9163SC is suited for routine measurements and is for use in semi-solid samples.

The KNiPHE electrode has a glass electrode that is encased in a stainless steel housing with a cutting blade at the tip. It is used for tough samples such as meat. It has a double junction design.

The 9162BNWP can be used for soft samples or routine clean water measurements. It has a single junction design.

For piercing semi-solid samples



ROSS® combination pH electrode with glass body, spear tip

- For cheese, meat, and fruit samples
- Measure samples as small as 100 µL
- Double junction for TRIS samples

For piercing soft samples



Combination pH electrode, glass body, spear tip

- For cheese, meat, and fruit samples
- Measure samples as small as 100 µL

For meat, cheese and sludge samples



KNiPHE® Double Junction combination pH electrode with stainless steel cutting blade

- For meat, cheese and sludge where glass alone may break
- Replacement electrode Cat. No. 9121APWP
- Replacement blade Cat. No. 712001
- Replacement sheath Cat. No. 712002

Rugged with an easy-to-clean bulb



Low resistance combination pH electrode with glass body, rugged bulb

- For routine or clean water measurements
- For soft samples

Cat. No.	8163BNWP 8163SC	9163SC	9120APWP	9162BNWP
pH Range	0-14	0-14	0-14	0-14
pH Precision	0.01	0.02	0.02	0.02
Temp. Range	0-100 °C	0-90 °C	0-60 °C	0-90 °C
Internal Reference	ROSS	Ag/AgCl	Ag/AgCl Double junction	Ag/AgCl
Junction	Ceramic	Ceramic	Ceramic	Ceramic
Fill Solution (Cat. No.)	3 M KCl (810007)	4 M KCl w/ Ag/AgCl (900011)	3 M KCl (910008-WA)	4 M KCl w/ Ag/AgCl (900011)
Dimension D (Dia) L (Length) T (Tip)	L - 110 mm T - 4.5 mm x 20 mm L	L - 95 mm D - 6.5 mm x 25 mm L	L - 215 mm D - 16 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof Screw Cap	Screw Cap	BNC Waterproof	BNC Waterproof

Cat. No.	Recommended Accessories
900011	Ag/AgCl fill solution
810007	ROSS fill solution
910008	3M KCl fill solution



Key Information

All cap diameters are 16 mm
All cable lengths are 1 meter



Thermo Scientific Orion pH Half Cell and Reference Half Cell Electrodes

pH half cells require the use of a reference half cell electrode.

Reference half cells are for use with either a pH half cell sensing electrode or an ISE half cell reference electrode. They are available as single or double reference designs. Clog free Sure-flow junctions are also available extending the life of your electrode.

Ross half cells should be paired together. 900100 and 900200 are silver chloride references for pH and ISE electrodes.

Accurate, ROSS rapid response in a half-cell design



ROSS® pH half-cell with glass body

- Use with 800300 ROSS Sure-Flow or 800500U ROSS Ultra reference electrodes

Accurate results in a half-cell



pH half-cell with glass body

- Use with 900100 single junction or 900200 double junctions reference electrodes

Top performance and long life



ROSS Ultra® reference half-cell with glass body

- Use with 8101BNWP or 8101SC ROSS pH half-cell or 8411BN ROSS sodium half-cell electrodes

For all samples including solvents



ROSS® Sure-Flow® reference half-cell with glass body

- Sure-Flow junction prevents clogging
- Use with 8101BNWP or 8101SC ROSS pH half-cell or 8411BN ROSS sodium half-cell electrodes


For use with ISE half-cell or pH electrodes



Double Junction Sure-Flow® reference half-cell with epoxy body

- Sure-Flow junction prevents clogging
- Double junction allows a variety of filling solutions to be used

For routine pH and many ISE measurements

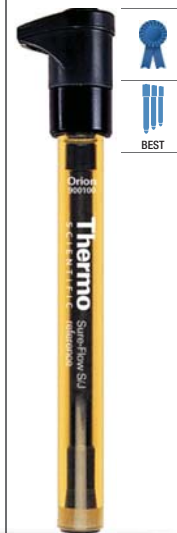

Single Junction Sure-Flow® reference half-cell with epoxy body

- Use with 9101BN and 9101SC pH half-cell electrodes
- Compatible with several ISEs

	8101BNWP 8101SC	9101BN 9101SC	800500U	800300	900200	900100
Cat. No.	8101BNWP 8101SC	9101BN 9101SC	800500U	800300	900200	900100
pH Range	0-14	0-14	0-14	0-14	0-14	0-14
pH Precision	0.01	0.02	–	–	–	–
Temp. Range	0-100 °C	0-90 °C	0-100 °C	0-100 °C	0-100 °C	0-100 °C
Internal Reference	ROSS	Ag/AgCl	ROSS	ROSS	Ag/AgCl Double junction	Ag/AgCl
Junction	–	–	Ceramic	Sure-Flow	Sure-Flow	Sure-Flow
Fill Solution (Cat. No.)	–	–	3 M KCl (810007)	3 M KCl (810007)	Equitransferent solution (900002) outer (900003)	Equitransferent solution w/ Ag/AgCl (900001)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 110 mm D - 13 mm	L - 110 mm D - 13 mm
Connector Type	BNC Waterproof Screw Cap	BNC Screw Cap	Pin Tip	Pin Tip	Pin Tip	Pin Tip

Cat. No.	Recommended Accessories
810007	ROSS fill solution
900001	Single junction reference fill solution
900002	Double junction reference inner fill solution
900003	Double junction reference outer fill solution



Key Information

All cap diameters are 16 mm at bottom of cap
All cable lengths are 1 meter



Thermo Scientific Orion ATC Probes

Accurate Temperature Measurement

pH Electrodes

ATC probes will measure the temperature of your sample quickly and accurately. They are extremely durable. There are a variety of options available to you to use depending on your application. Choose from a micro ATC probe, stainless steel, glass or epoxy body probe. The connector must be compatible with the meter you are using.

Fastest temperature response



Micro ATC probe with stainless steel tip and epoxy body

- For critical temperature monitoring
- Measures samples as small as 10 μ L
- Minimum depth of immersion is 3 mm

Rugged stainless steel



ATC probe with stainless steel body

- Extremely durable body
- For field, plant, and food applications

Solvent-resistant glass



ATC probe with glass body

- For solutions that contain organic solvents

Durable epoxy



ATC probe with epoxy body

- General purpose
- For aqueous samples, intermittent use in methanol or ethanol

Small diameter rugged stainless steel



ATC probe with stainless steel body

- Extremely durable body
- For field, plant, and food applications
- For use with Russell meters

Cat. No.	928007MD (Star)	927007MD (Star) 917007 (A+ Series) 927007 (PerpHecT)	927006MD (Star) 917006 (A+ Series) 927006 (PerpHecT)	927005MD (Star) 917005 (A+ Series) 927005 (PerpHecT) 917001 (Older Orion Meters)	917004
Temp. Range	0-100 °C	0-100 °C	0-100 °C	0-80 °C	0-100 °C
Temp. Accuracy	±1 °C	±2 °C	±2 °C	±2 °C	±2 °C
Dimension D (Dia) L (Length) T (Tip)	L - 117 mm D - 5 mm D - 1 mm x 38 mm L	L - 120 mm D - 6 mm	L - 120 mm D - 8 mm	L - 120 mm D - 6 mm	L - 120 mm D - 3 mm
Connector Type	MiniDIN for Star	MiniDIN (Star) 8 Pin DIN (A+ Series) [†] Phono Tip (PerpHecT)	MiniDIN (Star) 8 Pin DIN (A+ Series) [†] Phono Tip (PerpHecT)	MiniDIN (Star) 8 Pin DIN (A+ Series) [†] Phono Tip (PerpHecT) Dual Banana Plug (Older Orion Meters)	2.5 mm Phono Jack for Russell meters



2.5 mm Phono Tip



Dual Banana Plug



Phono Tip (PerpHecT)



MiniDIN (Star)



8 Pin DIN (A Series)

Key Information

All cap diameters are 16 mm except 928007MD
All cable lengths are 1 meter



Thermo Scientific Orion Redox/ORP and ORP Triode Electrodes

Reliable Redox Measurements

ORP measurements are easily made with your choice of ORP electrodes. Use our reliable ORP standard and compare your results to the Standard Hydrogen Electrode.

The 9678BNWP is a durable epoxy body electrode with a non-clog Sure-Flow junction. The 9778BNWP offers a chemical resistant glass body. ORP triodes have a durable epoxy body and can measure temperature also. They are available in refillable design or low-maintenance gel filled styles.

Durable and clog-free



Sure-Flow[®] combination redox/ORP electrode with epoxy body

- For use in water, wastewater, metal plating, and biotech samples
- Sure-Flow junction prevents clogging

Solvent-resistant glass body



Combination redox/ORP electrode with glass body

- For use in water, wastewater, metal plating and organic solvent samples

Easy-to-clean with built-in ATC



ORP/ATC Triode[™] with epoxy body, refillable

- For use in water and wastewater
- Epoxy body for ruggedness and durability

Low maintenance with built-in ATC



ORP/ATC Triode[™] with epoxy body, low maintenance gel

- For use in water and wastewater
- Epoxy body for ruggedness and durability

	Cat. No. 9678BNWP	9778BNWP	9180BNMD (Star) 9180BN (A+ Series)	9179BNMD (Star) 9179BN (A+ Series)
pH Range	–	–	–	–
Temp. Range	0-90 °C	0-100 °C	0-90 °C	0-80 °C
Temp. Accuracy	–	–	±2.0 °C	±2.0 °C
Internal Reference	Ag/AgCl	Ag/AgCl	Ag/AgCl	Ag/AgCl
Junction	Sure-Flow	Ceramic	Glass Fiber	Wick
Fill Solution (Cat. No.)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)	4 M KCl w/ Ag/AgCl (900011)	–
Dimension D (Dia) L (Length) T (Tip)	L - 110 mm D - 13 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm	L - 120 mm D - 12 mm
Connector Type	BNC Waterproof	BNC Waterproof	BNC Waterproof - MiniDIN (Star) BNC Waterproof - 8 Pin (A+ Series)	BNC Waterproof - MiniDIN (Star) BNC Waterproof - 8 Pin (A+ Series)

Cat. No.	Recommended Accessories
900011	Ag/AgCl fill solution
967901	ORP standard 475 mL
967961	ORP standard 5 x 60 mL



BNC Waterproof



MiniDIN (Star)



8 Pin DIN (A Series)

Key Information

All cap diameters are 16 mm at bottom of cap

All cable lengths are 1 meter



Thermo Scientific Orion Silver Billet and Karl Fischer Electrodes

Electrodes for Titrations and Speciality Applications

The 977900 is a double platinum chemical resistant glass electrode for use with Karl Fischer titrations. It has a ground glass joint on the body to fit into titration vessels.

The 9780SC is a glass silver billet electrode used in halide titrations.

Thermo Scientific Orion Storage Sleeve and Base

If you ever have had an electrode drop on a lab bench and break you will want to use the storage sleeve and base, 810017.

Features and Benefits

- Protects electrode from breakage when not in use
- Covers entire glass body of standard size pH electrodes (12 x 120 mm)
- pH bulb stays conditioned when not in use
- Weighted base prevents electrode from tipping
- Sleeve can be removed from base to store in electrode holder



Storage Sleeve and Base 810017

For Karl Fischer titrations



For halide titrations



Karl Fischer double platinum electrode with glass body

- For accurate Karl Fischer titrations

Silver Billet combination electrode

- For accurate and reliable halide titrations

Cat. No.	977900	9780SC
pH Range	Endpoint Indicator	Endpoint Indicator
Temp. Range	0-40 °C	0-80 °C
Internal Reference	Platinum	Ag/AgCl
Junction	-	Ceramic
Fill Solution (Cat. No.)	-	4 M KCl w/ Ag/AgCl (900011)
Dimension D (Dia) L (Length) T (Tip)	L - 120 mm D - 12 mm	L - 150 mm D - 12 mm
Connector Type	Dual Pin Tip	Screw Cap



Screw Cap



Dual Pin Tip

Key Information

Environmentally-safe mercury-free
All cap diameters are 16 mm at bottom of cap
All cable lengths are 1 meter



Thermo Scientific Orion Star Stirrer Probe

Ideal for laboratory pH and ISE measurements



Orion Star Automatic Stirrer Probe

Thermo Scientific Orion Star Stirrer probes are the answer to economical and convenient stirring.

- Use with the following Orion benchtop meters for automatic control and stirring:
 - Orion VERSA STAR
 - Orion DUAL STAR
 - Orion Star A210-series
 - Orion 3-, 4- and 5-Star/Star Plus benchtop
- Eliminates the hassles of magnetic stir plates and stir bars
- No heat transfer from stir plate
- No need to capture & wash stir bars
- No potential electrode bulb damage from stir bars
- Competitive pricing allows you to take advantage of the stirrer probe benefits at half the price of similar models
- Conveniently plugs into the back panel of the compatible benchtop meters for stirrer power, speed and control

It is so easy-to-use! Plug the stirring probe into the back panel of an Orion VERSA STAR, DUAL STAR, Star A210-series or benchtop 3-, 4- and 5- Star/Star Plus meter and place it into an electrode stand with the measuring electrode. Control the on/off function and stirring speed using the meter controls. Simply insert the stirring probe into a sample and rinse it between measurements.

Stirring Probes with Paddles

Cat. No.	Description
096019	Orion Star Stirrer probe with paddle
096021	Replacement paddles, 3 pack



Accessories

Orion DUAL STAR™


Pages 10-11

For easy ISE testing, pair the automatic stirrer probe with an Orion DUAL STAR meter.



Thermo Scientific Orion Electrode Connectors and Cables

Connectors that stay dry and connected

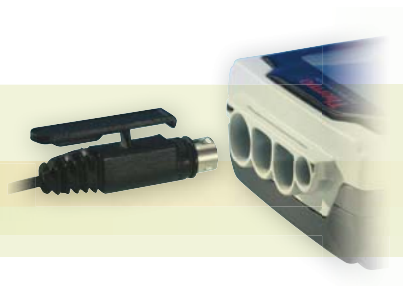

If you ever lost an electrode because of a failed connection, you'll appreciate the Orion Star Series' proprietary waterproof BNC and MiniDIN locking connectors. Adapter cables can be used to connect Orion Star Series electrodes to a wide variety of other meters.



Electrode Adapter Cables

Cat. No.	Meter Input	Electrode Connector	Adapter Needed
090033	BNC	U.S. standard	US standard to BNC adapter
91CBNC	BNC	Screw cap	Detachable cable to BNC connector
090048	BNC	Karl Fischer double pin tip	Karl Fischer adapter
090032	U.S. standard	BNC	BNC to U.S. standard adapter
91USCB	U.S. standard	Combination electrode with screw cap	Detachable cable to U.S. standard connector
91USHC	U.S. standard	Half-cell electrode with screw cap	Detachable cable to half-cell U.S. std. connector
090036	F LEMO (Metrohm)	BNC	BNC to F LEMO adapter
090035	LEMO miniature (Mettler)	BNC	BNC to LEMO miniature adapter
91CLMO	LEMO miniature (Mettler)	Screw cap	Detachable cable to LEMO connector
090034	E DIN (Knick, Schott, WTW)	BNC	BNC to E DIN adapter
91CDIN	E DIN (Knick, Schott, WTW)	Screw cap	Detachable cable to E Din connector
090037	Radiometer no. 7	BNC	BNC to radiometer adapter
91USRF	2 mm pin tip	Screw cap	Detachable cable to 2.5 mm pin tip connector
91CBNT	Other	Screw cap	Detachable cable to stripped end

Electrode Extension Cables

Cat. No.	Description
910026-WA	15 ft. extension cable, pin tip connector
910027	15 ft. extension cable, BNC connector
910028	15 ft. extension cable, 8 pin DIN connector for 917005, 917006 and 917007 ATC probes
910030	15 ft. extension cable, BNC and 3.5 mm phono tip connectors for 9207BN pH/ATC Triode
910031	15 ft. extension cable, banana jack connector for 917001 and 917002 ATC probes
910032	15 ft. extension cable, 8 pin mini DIN for ATC probes for star series meters

Adapter Cables (For Star Series Electrodes to Older Meters)

Cat. No.	Description	Meter Capabilities
1010050-WA	MiniDIN ATC probe to 3.5 mm phono tip meter	Use on 310 320, 330, 350 370, 555A 550A, 535A and 162A meters
1010051	MiniDIN ATC probe to 8 pin DIN meter	Use on 210A+, 230A+ 250A+, 290A+ 410A+, 420A+ 520A+, 525A+ 710A+, 720A+ and 920A+ meters
1010800	MiniDIN DO probe to 8 pin waterproof DIN DO meter	Use on 830A 835A and 862A meters
1010801	MiniDIN DO probe to 8 pin DIN DO meter	Use on 805A+, 810A+ and 850A+ meters
1010900-WA	MiniDIN conductivity probe to 8 pin waterproof DIN conductivity meter	Use on 555A 550A, 162A 135A, and 130A meters
1010901	MiniDIN conductivity probe to 8 pin DIN conductivity meter	Use on 150A+, 145A+ 125A+, 115A+ and 105A+ meters



Thermo Scientific Orion pH Buffers and Solutions

We have the pH buffers, storage solutions, cleaning solutions, kits and pH electrode filling solutions for every application. All Orion pH buffers and standards are traceable to NIST reference materials. A wide variety of sizes are available from 15 mL single use pouches to large volume 19 L cubitainers.



pH Buffers in 475 mL (1 Pint) Bottles

Great for standard laboratory applications and everyday use

Cat. No.	Description
810199	ROSS All-in-One pH Buffer Kit 475 mL each of pH 4.01, 7.00 and 10.01 buffers; 475 mL of ROSS pH electrode storage solution (810001); 60 mL of pH electrode cleaning solution; and 12 mm diameter electrode storage bottle
910199	Standard All-in-One pH Buffer Kit 475 mL each of pH 4.01, 7.00 and 10.01 buffers; 475 mL of pH electrode storage solution (910001); and 12 mm diameter electrode storage bottle
910168	pH 1.68 buffer, NIST traceable, 475 mL
910104	pH 4.01 buffer, color coded red, NIST traceable, 475 mL
910105	pH 5.00 buffer, color coded orange, NIST traceable, 475 mL
910686	pH 6.86 buffer, DIN standard, NIST traceable, 475 mL
910107	pH 7.00 buffer, color coded yellow, NIST traceable, 475 mL
910918	pH 9.18 buffer, DIN standard, NIST traceable, 475 mL
910110	pH 10.01 buffer, color coded blue, NIST traceable, 475 mL
910112	pH 12.46 buffer, NIST traceable, 475 mL



pH Buffers in 5 x 60 mL (5 x 2 Oz) Bottles

Perfect for field measurements, occasional pH analysis or limited lab space

Cat. No.	Description
916099	All-in-One 60 mL pH Buffer Kit 60 mL each of pH 4.01, 7.00 and 10.01 buffers; 60 mL of pH electrode storage solution (910060); and 60 mL of pH electrode cleaning solution (900024)
9116860	pH 1.68 buffer, NIST traceable, 5 x 60 mL
910460	pH 4.01 buffer, color coded red, NIST traceable, 5 x 60 mL
916860	pH 6.86 buffer, DIN standard, NIST traceable, 5 x 60 mL
910760	pH 7.00 buffer, color coded yellow, NIST traceable, 5 x 60 mL
9191860	pH 9.18 buffer, DIN Standard, NIST traceable, 5 x 60 mL
911060	pH 10.01 buffer, color coded blue, NIST traceable, 5 x 60 mL
911260-WA	pH 12.46 buffer, NIST traceable, 5 x 60 mL



pH Buffers and Rinse Solution in Individual Use Pouches
Ideal for field measurements, pharma applications or single use buffer requirements

Cat. No.	Description
910410-WA 910425	pH 4.01 Buffer, Color Coded Red, NIST Traceable Individual use pouches, 10 x 15 mL Individual use pouches, 25 x 15 mL
910710 910725	pH 7.00 Buffer, Color Coded Yellow, NIST Traceable Individual use pouches, 10 x 15 mL Individual use pouches, 25 x 15 mL
911010 911025-WA	pH 10.01 Buffer, Color Coded Blue, NIST Traceable Individual use pouches, 10 x 15 mL Individual use pouches, 25 x 15 mL
911110 911125	pH Electrode Rinse Solution Individual use pouches, 10 x 15 mL Individual use pouches, 25 x 15 mL



pH Buffers in 19 L (5 Gallon) Cubitainers with Easy-Pour Spout

Excellent for large laboratories and multiple users

Cat. No.	Description
9104CB	pH 4.01 buffer, color coded red, NIST traceable, 19 L (5 gallon) cubitainer
9107CB	pH 7.00 buffer, color coded yellow, NIST traceable, 19 L (5 gallon) cubitainer
9110CB	pH 10.01 buffer, color coded blue, NIST traceable, 19 L (5 gallon) cubitainer



pH Electrode Storage Solution and ROSS pH Electrode Storage Solution

Get the fastest, most reliable performance from your pH electrode

Cat. No.	Description
810199	ROSS All-in-One pH Buffer Kit 475 mL each of pH 4.01, 7.00 and 10.01 buffers; 475 mL of ROSS pH electrode storage solution (810001); 60 mL of pH electrode cleaning solution; and 12 mm diameter electrode storage bottle
910199	Standard All-in-One pH Buffer Kit 475 mL each of pH 4.01, 7.00 and 10.01 buffers; 475 mL of pH electrode storage solution (910001); and 12 mm diameter electrode storage bottle
916099	All-in-One 60 mL pH Buffer Kit 60 mL each of pH 4.01, 7.00 and 10.01 buffers; 60 mL of pH electrode storage solution (910060); and 60 mL of pH electrode cleaning solution (900024)
810001	ROSS pH Electrode Storage Solution 475 mL
910001	pH Electrode Storage Solution 475 mL
910060	5 x 60 mL
9100CB	19 L (5 gallon) cubitainer



pH Electrode Cleaning Solutions

Specially formulated cleaning solutions for slow, dirty or clogged pH electrodes

Cat. No.	Description
900020	pH Electrode Cleaning Kit – 30 mL of cleaning solution A and C, 60 mL of cleaning solution B and D, beaker and pipet
900021-WA	pH electrode cleaning solution A for protein removal, 4 x 30 mL, beaker and pipet
900022-WA	pH electrode cleaning solution B for bacteria removal, 4 x 60 mL, beaker and pipet
900023	pH electrode cleaning solution C for general cleaning, 4 x 30 mL, beaker and pipet
900024	pH electrode cleaning solution D for general cleaning and oil and grease removal, 4 x 60 mL, beaker and pipet
510015	Stain lifter solution for no cal fill solution and ORP standard stain removal, 60 mL



pH Specialty Solutions and ORP Standards

Cat. No.	Description
700001	Pure Water Low Ionic Strength pH Test Kit – 4 x 475 mL of pH 6.97 buffer, 2 x 475 mL of pH 4.10 buffer, 2 x 60 mL of pHISA adjuster and app note
700003	Pure water pHISA low ionic strength adjuster, 5 x 60 mL
700402	Pure water pH 4.10 buffer B for low ionic strength pH samples, 4 x 475 mL
700702	Pure water pH 6.97 buffer A for low ionic strength pH samples, 4 x 475 mL
700902	Pure water pH 9.15 buffer C for low ionic strength pH samples, 4 x 475 mL
700010	Total Alkalinity Test Kit – 475 mL of alkalinity reagent (700011-WA), 475 mL of alkalinity standard (700012), conversion chart and app note
700011-WA	Total alkalinity reagent refill, 4 x 475 mL
700012	Total alkalinity standard/control refill, 475 mL
967901	ORP Standard , +420 mV vs. standard hydrogen electrode (EH), +220 mV vs. Ag/AgCl electrode using 900011 fill solution, 475 mL
967961	ORP Standard , +420 mV vs. standard hydrogen electrode (EH), +220 mV vs. Ag/AgCl electrode using 900011 fill solution, 5 x 60 mL



Pure Water® pH Test Kit: Get fast, accurate pH results in high purity waters such as well, rain, distilled/deionized, boiler feed and process. The kit includes special low ionic strength buffers and pHISA additive that increases sample ionic strength without changing the pH. For best results, a high quality pH electrode such as the ROSS Ultra 8102BNUWP is recommended (purchase separately).



Total Alkalinity Test Kit: A two-step direct measurement of total alkalinity and pH. Calibrate for pH, add alkalinity reagent and read total alkalinity of 0-200 ppm CaCO₃ from the included pH conversion chart.

Thermo Scientific Orion Electrode Fill Solutions and Accessories



pH Electrode and Reference Electrode Fill Solutions

Ensure the proper performance and function from your electrode by using our specially formulated fill solutions

Cat. No.	Description	Use With Electrodes
810007	ROSS electrode fill solution, 3 M KCl, 5 x 60 mL	ROSS Ultra, ROSS and Micro ROSS Electrodes 800300, 800500U, 8102BN, 8102BNUWP, 8103BN, 8103BNUWP, 8104BN, 8104BNUWP, 8115BN, 8115BNUWP, 8135BN, 8135BNUWP, 815600, 8156BNUWP, 8157BNU, 8157BNUMD, 8157UWMD, 8163BNWP, 8165BNWP, 8172BNWP, 8175BNWP, 8220BNWP, 8302BNUMD
900011	Silver Chloride pH electrode fill solution, 4 M KCl with Ag/AgCl, 5 x 60 mL	Standard, Specialty, Single Junction Refillable Green, Micro and ORP Electrodes 9102BNWP, 9103BNWP, 9104BNWP, 9156BNWP, 9157BN, 9157BNMD, 9162BNWP, 9165BNWP, 9172BNWP, 9180BN, 9180BNMD, 9678BNWP, 9778BNWP, 9780SC, 9810BN, 9826BN, 9863BN, GS9156BNWP
900004	Silver Chloride pH electrode (low level) fill solution, 2 M KCl with Ag/AgCl, 5 x 60 mL	Standard, Specialty, Single Junction Refillable Green, Micro and ORP Electrodes (low ionic strength samples) 9102BNWP, 9103BNWP, 9104BNWP, 9156BNWP, 9157BN, 9157BNMD, 9162BNWP, 9165BNWP, 9172BNWP, 9180BN, 9180BNMD, 9678BNWP, 9778BNWP, 9780SC, 9810BN, 9826BN, 9863BN, GS9156BNWP
910008-WA	Double junction pH electrode fill solution, 3 M KCl, 5 x 60 mL	Double Junction, Double Junction Refillable Green and KNPHE Electrodes 9102DJWP, 9110DJWP, 9120APWP, GD9156BNWP
510011	No Cal pH electrode fill solution, 5 x 60 mL	No Cal Electrodes 5107BNMD, 5107NC
610001	pHuture pH electrode fill solution, 5 x 60 mL	pHuture Electrodes
900001	Single junction reference electrode fill solution, equitransferent solution with Ag/AgCl, 5 x 60 mL	Single Junction Reference Electrode 900100
900002	Double junction reference electrode inner fill solution, equitransferent solution with Ag/AgCl, 5 x 60 mL	Double Junction Reference Electrode 900200
900003	Double junction reference electrode outer fill solution, 10 % KNO ₃ , 5 x 60 mL	Double Junction Reference Electrode 900200

pH Accessories

Cat. No.	Description
020017	No Cal electrode storage chamber
810017	Storage sleeve and base for 12 mm x 120 mm electrodes
910003	12 mm electrode storage bottles, 3 pack
910004	8 mm electrode storage bottles, 3 pack
910005	Bulb guard for glass pH electrode, 5 pack
910006	6 mm electrode storage bottles, 3 pack



Signifies a hazardous solution.

See terms and conditions for important shipping information at www.thermoscientific.com/water.

Visit the WAI Online Library on www.thermoscientific.com/water for the most up-to-date MSDS and Certificate of Analysis files for Orion solutions.

