


The ULT Series refrigerated bath recirculators are self-contained, compact, cooling units designed for circulating to external applications. They provide temperature stability for calibration applications and for instrumentation cooling.

## NESLAB ULT Series Bath Circulators

Designed to achieve low temperatures and maintain excellent temperature stability for consistent results

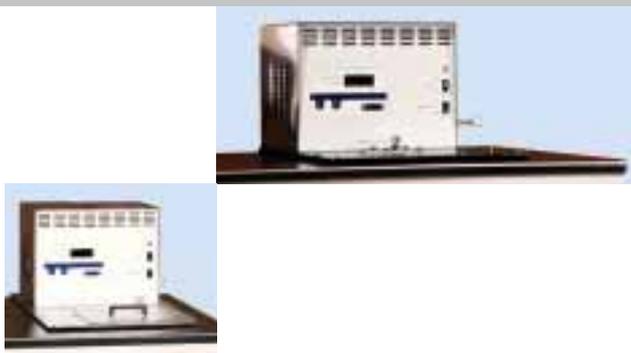

Typical laboratory applications for the ULT Series - 90°C to +10°C:

- Heat exchangers
- Cloud point/Pour point
- Calibration
- Cell freezing
- Viscosity studies
- Kinetic cooling
- Cooling GC ovens
- Petroleum studies

*Note: The ULT 80DZT unit temperature range is -80°C to +80°C*



### Low Temp Good Value

The NESLAB ULT Series controls the temperature of the reservoir, cools the fluid, and circulates this fluid externally. Temperature remains steady to a very tight tolerance to give you an excellent calibration source.

When it comes to heat removal, the environmentally responsible refrigeration system lets you cool more equipment, glassware, or instrumentation than you can with a benchtop circulator. A good value for low temperature applications.

The ULT Series has an industrial-grade circulating pump that delivers consistent flow which allows fluid to circulate long distances, even through small I.D. tubing. And you no longer need to locate your bath circulator next to your application.

Plus for those applications requiring a wider temperature range, such as reaction vessel heating and cooling, Thermo Electron Corporation offers an optional extended temperature range ULT unit that can circulate between -80°C and +80°C.

### Choose Range of Options

While each ULT unit comes with many standard features, a full range of options and accessories is available to meet your specific application needs.



Thermo Electron Corporation has a well-established reputation in temperature control through its NESLAB and HAAKE product lines. Formerly independent companies, NESLAB and HAAKE have joined forces within Thermo to provide proven temperature control technology along with global service and support. With over 75 years of extensive industry experience, Thermo professionals worldwide continue to develop and support the solutions that help you analyze, detect, measure, and control your application with increasingly advanced precision.

### NESLAB ULT Series Specifications

	ULT 80ZT	ULT 80	ULT 95
<b>Temperature range*</b>	-80°C to +80°C	-80°C to +10°C	-90°C to -30°C
<b>Temperature stability</b>	+/- 0.03°C	+/- 0.03°C	+/- 0.02°C
<b>Cooling capacity</b>			
60 Hz	250 watts at -70°C	250 watts at -70°C	350 watts at -80°C
50 Hz	200 watts at -70°C	200 watts at -70°C	280 watts at -80°C
<b>Compressor</b>	2 x 1 hp	2 x 1 hp	2 x 1.5 hp
<b>Heater</b>	1200 watts	1200 watts	1650 watts
<b>Bath volume</b>			
gallon	4.0	4.0	4.0
liter	15.1	15.1	
<b>Unit dimensions</b>			
H x W x D in	47.50 x 27.375 x 17.75	47.50 x 27.375 x 17.75	48 x 32.125 x 21.50
H x W x D cm	102.7 x 69.2 x 45.1	102.7 x 69.2 x 45.1	119.4 x 81.6 x 54.6
<b>Bath opening/Bath depth</b>			
W x L/D in	7 x 5.4/9.5	7 x 5.4/9.5	2 in diameter fill port
W x L/D cm	17.8 x 13.7/24.1	17.8 x 13.7/24.1	5.1 cm diameter fill port
<b>Pump performance</b>			
60 Hz (LPM)	10 LPM @ 0' head, 12' max	10 LPM @ 0' head, 12' max	16 LPM @ 0' head, 21' max
(GPM)	2.6 GPM @ 0' head, 12' max	2.6 GPM @ 0' head, 12' max	3.3 GPM @ 0' head, 21' max
50 Hz (LPM)	10 LPM @ 0' head, 11' max	10 LPM @ 0' head, 11' max	12.4 LPM @ 0' head, 31' max
(GPM)	2.6 GPM @ 0' head, 11' max	2.6 GPM @ 0' head, 11' max	3.3 GPM @ 0' head, 31' max
<b>Pump</b>	force and suction	force and suction	increased agitation
<b>Unit weight</b>			
lb	336	336	370
kg	152.4	152.4	168

Pumping specifications were determined using water. Stability determined using fluid with specific gravity of 0.6 for both models. ULT 95: - 30°C fluid temperature. ULT 80: - 20°C fluid temperature. Ambient temperature of 20°C for both models. Specifications subject to change.

## Standard Features

Feature	Benefit
<b>Circulating pump</b>	Delivers a consistent flow when working with dense or viscous fluids
<b>Force/suction pump</b>	Provides versatility of circulating through a closed system, open system, or two applications
<b>Heater</b>	Offers rapid heating to minimize waittime
<b>Digital temperature controller</b>	Provides precise setpoint and readout to a resolution of 0.01°C
<b>Cascade refrigeration system</b>	Provides CFC-free refrigeration system for precise temperature control and optimum stability; allows for fast cooling rates and higher heat removal capacities at low temperatures
<b>Automatic load reset</b>	Compensates for changes in the bath load, eliminating shifts in setpoint accuracy
<b>Digital display</b>	Offers the user simple operation
<b>Stainless steel bath</b>	Offers convenient and easy cleaning


## Options and Accessories

Feature	Benefit
<b>Sealed lid for ULT 80 Series</b>	Prevents moisture buildup
<b>NESLAB NEScom software</b>	Automates your entire temperature control process from a PC system
<b>Plumbing kits</b>	
Tygon	Allows circulation between -25°C and +100°C and includes 25' of tygon tubing, 25' of tubing insulation, and 4 hose clamps
Silicone	Allows circulation between -100°C and +100°C and includes 25' of silicone tubing, 25' of tubing insulation, and 4 hose clamps
<b>Remote sensor</b>	Allows remote temperature control of an external vessel when circulating. Available in a variety of lengths and diameters to match many applications
<b>Hollow ball kit</b>	Insulates your bath reservoir from temperature losses while allowing immersion of a variety of vessels such as flasks or test tubes. This kit contains 100 1.5" diameter balls
<b>Stainless steel leveling device *</b>	When circulating to an open container, this device ensures that the fluid level remains constant
<b>Flow controller**</b>	Quick and easy set up for external circulation to open container
<b>Ethylene glycol</b>	Allows circulation to temperatures down to -30°C in a 50/50 blend when mixed with water
<b>Chloramine-T algicide</b>	Restricts growth of algae to protect equipment and instrumentation


\*Used with standard ring stand

\*\*Necessary to operate stainless steel leveling device


Cooling Capacity

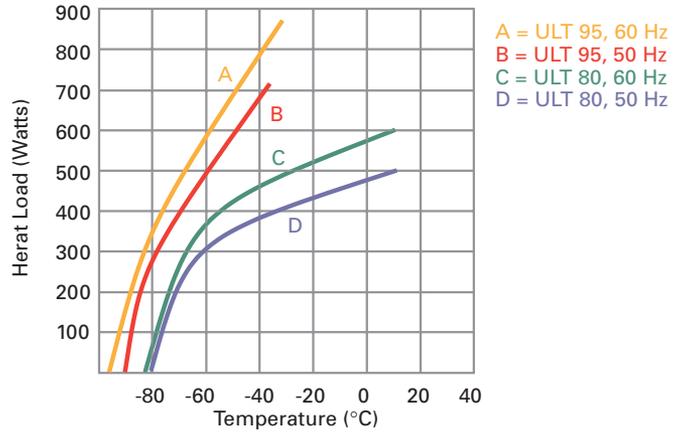

Pumping Capacity

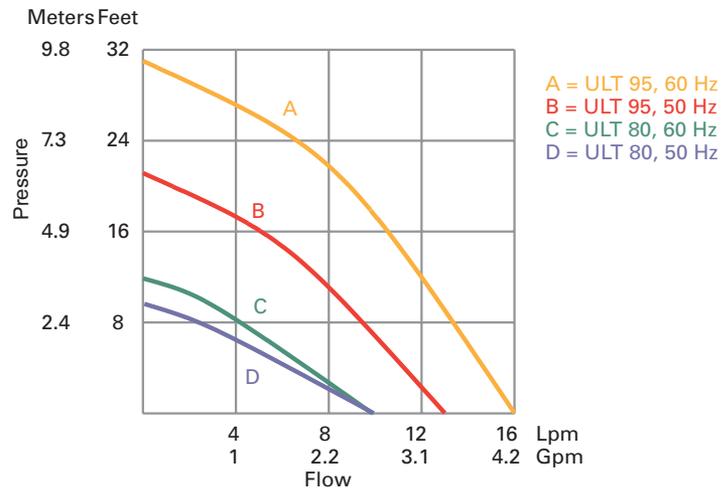

Time to Temperature

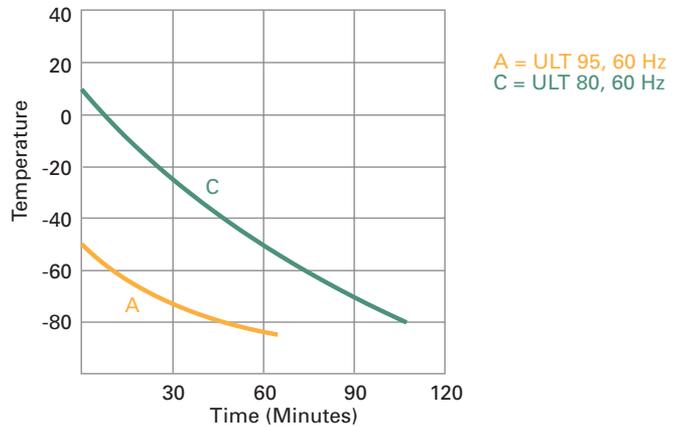

**USA**  
 25 Nimble Hill Rd.  
 Newington, NH 03801  
 Tel. 800 258 0830  
 info.tc.us@thermo.com

**France**  
 16 Avenue du Québec - Silic 765  
 91963 Courtaboeuf Cedex  
 Tel. +33 (0) 1 60 92 48 00  
 info.tc.fr@thermo.com

**United Kingdom**  
 Unit 5, The Ringway Centre  
 Basingstoke, Hampshire  
 RG21 6YH  
 Tel. +44 (0) 870 609 9254  
 info.tc.uk@thermo.com

**Benelux**  
 Takkebijsters  
 4817 BL Breda  
 Tel. +31 (0) 76 5 87 98 88  
 info.tc.nl@thermo.com

**International/Germany**  
 Dieselstr. 4  
 76227 Karlsruhe  
 Tel. +49 (0) 721 4 09 44 44  
 info.tc.de@thermo.com

©2004 Thermo Electron Corporation. The information contained herein is subject to change without notice. Any trademarks, tradenames or copyrights remain solely the property of the manufacturer unless otherwise stated. The only warranties for Thermo products are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Thermo shall not be liable for technical or editorial errors or omissions contained herein.